

# QUALITEK®

## Delta Elite™

### 775-2

#### Water-Soluble Solder Paste

#### DESCRIPTION

775-2 is a halogen free, slump resistant, water-soluble solder paste designed for surface mount and other electronic assembly applications. 775-2 utilizes a low volatility solvent system, resulting in a tack time over 12 hours. Post soldering residue can be easily removed with warm DI water cleaning systems.

#### BENEFITS

- Halogen free
- Non-hygroscopic
- High tack force
- High slump resistance
- Flux residues easily removed with warm DI water
- Pleasant odor
- Extended stencil life

#### APPLICATION

##### STENCIL PRINTING/PARTICLE SIZE

≥ 50 mil pitch: Use -200+325 mesh  
≥ 16 mil pitch: Use -325+500 mesh  
≤ 16 mil pitch: Use -400+635 mesh

##### ALLOYS

Sn63/Pb37, Sn62/Pb36/Ag2, etc.  
(Meets J-STD-006 Specification)

##### METAL CONTENT

Stencil Printing: 90%  
Screen Printing: 88%

#### REFLOW PROFILE

The melting temperature of the solder and the heat resistance of components determine reflow profile. 775-2 can be processed in most reflow media. (i.e. IR, Vapor-phase, Forced convection, etc.). Ramp rate of 2.5-3.0°C per second is desirable, since most components are rated for 4.0°C per second.

#### PHYSICAL / CHEMICAL CHARACTERISTICS

Color and Appearance	Mt	AMS Advant 8
Slump Test		
Copper Mirror Test	Pass/No br	Tel www.i
Surface Insulation Resistance(cleaned)-Ohms		
J-STD-004		
pH-5% Aqueous Solution (Flux Extract)	7.0 - 8.0	
Viscosity		
Malcom <sup>1</sup>	210-250 kcps, 90% metal, (-325+500 mesh)	
Brookfield <sup>2</sup>	1000 kcps +/- 10%, 90% metal, (-325+500 mesh)	
Tack <sup>3</sup>		
Time	>12 hours	
Initial tack force	38.6 grams (1.16g/mm <sup>2</sup> )	
Tack retention after 24 hours	23.2 grams (.70g/mm <sup>2</sup> )	

#### SHIPPING & STORAGE

Recommended Storage Temperature 35°-50°F

#### SHELF LIFE

Unopened Container 35°-65°F 6 Months (from DOM)  
77°F 1 Months (from DOS)

1. Malcom PCU-Series, 10 RPM, 25°C
2. Brookfield RVT D, TF spindle, 5 RPM, 25°C, 0.75" spindle depth
3. Per IPC-TM-650 2.4.44

Delta Elite® is a registered trademark of Qualitek International, Inc.


For further information or supplies please contact AMS Ltd on  
Phone 01260 270950 Fax 01260 270950  
email:- sales@ams-electronics.co.uk  
www.ams-electronics.co.uk



WORLDWIDE BRANCHES: UNITED KINGDOM – MEXICO – CHINA – PHILIPPINES – SINGAPORE-USA

This data is based on information that the manufacturer believed to be reliable and offered in good faith. Qualitek International, Inc. makes no warranties expressed or implied as to its accuracy and assumes no responsibilities and liabilities arising out of its use by others as conditions and methods of use of the products is beyond the control of Qualitek International, Inc. The user must determine the suitability of the product before using it on a commercial basis. The warranties extend only to the conformity of the product to the physical descriptions. In no event will Qualitek International, Inc. be responsible for special, incidental and consequential damages whether the claim is in contract, negligence or otherwise.

# 775-2 PROFILE

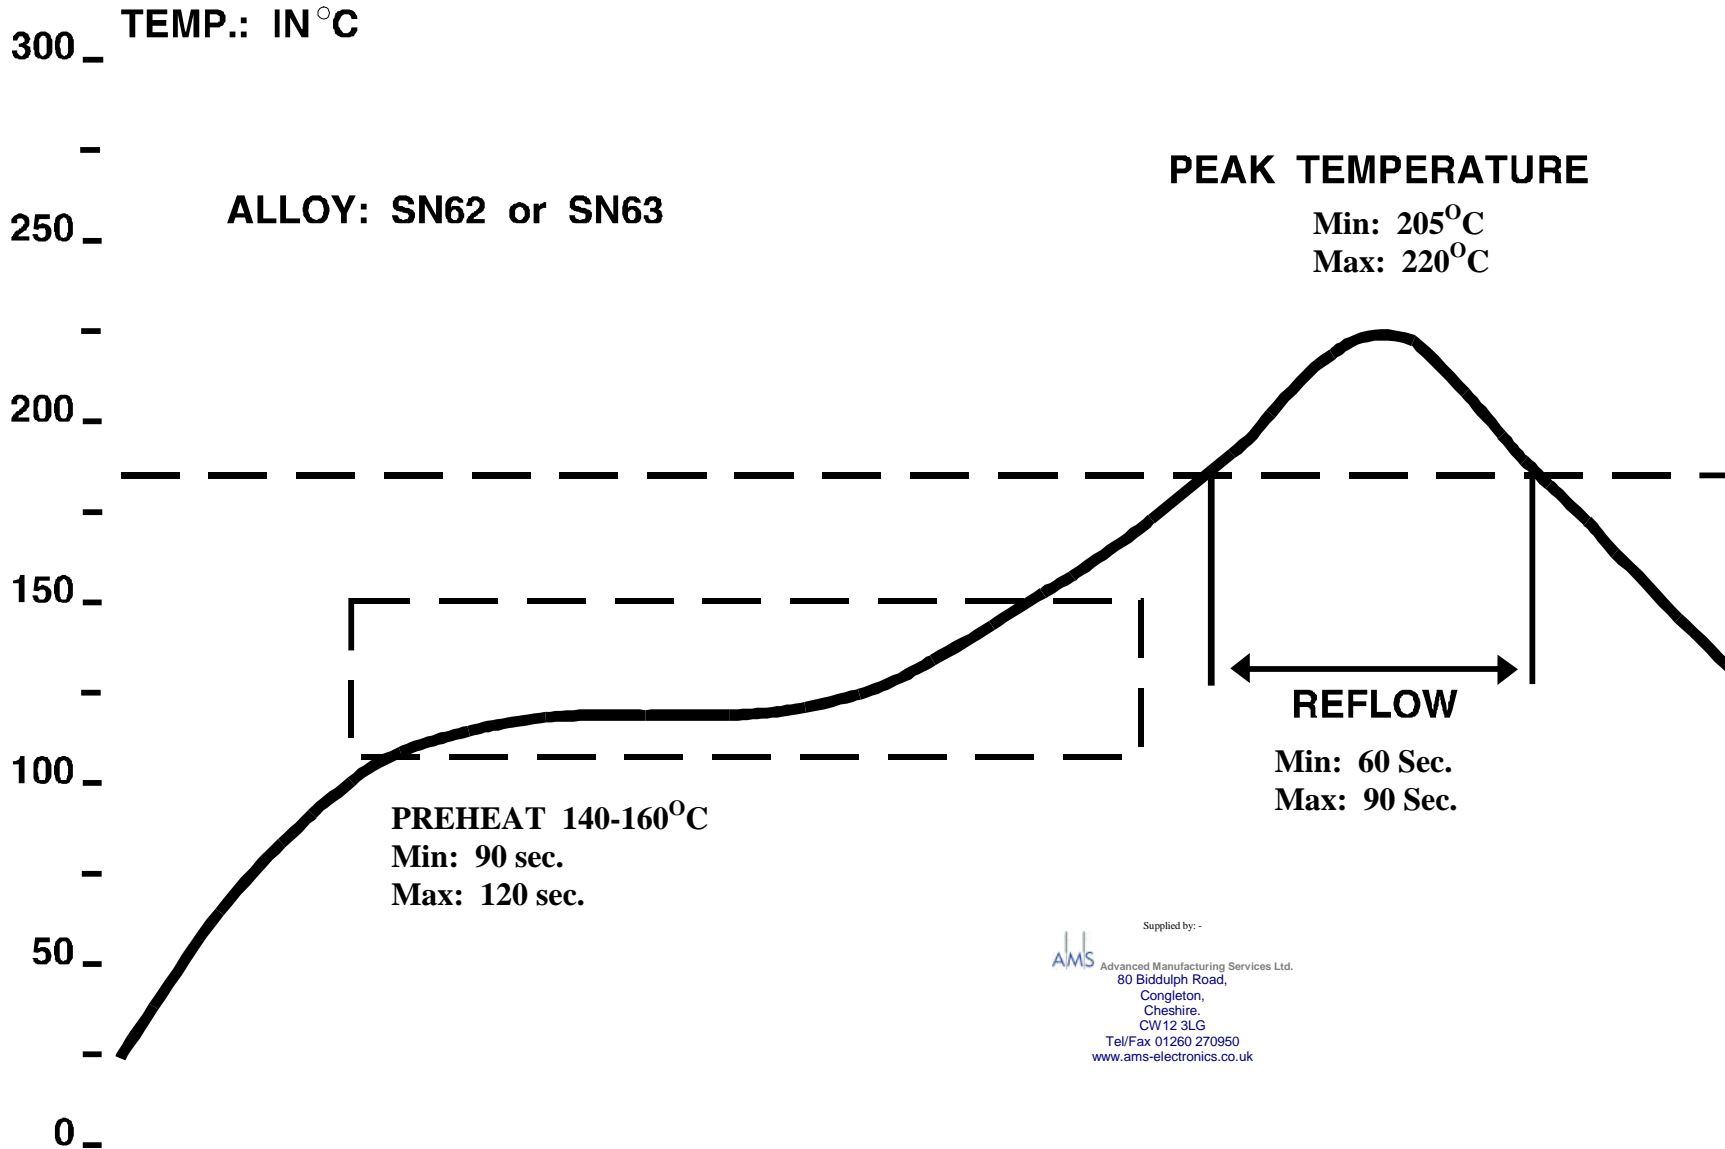

Supplied by: -  
**AMS** Advanced Manufacturing Services Ltd.  
80 Biddulph Road,  
Congleton,  
Cheshire,  
CW12 3LG  
Tel/Fax 01260 270950  
[www.ams-electronics.co.uk](http://www.ams-electronics.co.uk)