

DG78 600V 40A 13Pitch



材质及规格处理

塑件: PBT UL 94V-0
端子: 黄铜, 1.0厚 镀锡
螺丝: 钢, M4 镀镍

性能

额定电压/电流: 600V/40A
使用温度: $-40^{\circ}\text{C} \sim +130^{\circ}\text{C}$
耐电压: AC2000V/Min
绝缘阻抗: $1000\text{M}\Omega/\text{DC}500\text{V}$
适用线径: 18 ~ 10AWG
最大锁紧扭力: 18kg/cm



Materials

Housing: PBT, UL94V-0
Terminal: Brass, 1.0t, Tin-Plated
Screw: Steel, M4 Ni-Plated



Capability

Rated: 600V/40A
Temp. Range: $-40^{\circ}\text{C} \sim +130^{\circ}\text{C}$
Withstand Voltage: AC2000V/Min
Insulation Resistance: $1000\text{M}\Omega/\text{DC}500\text{V}$
Wire Range: 18 ~ 10AWG
Max. Torque Value: 18kg/cm



订货方式 HOW TO ORDER

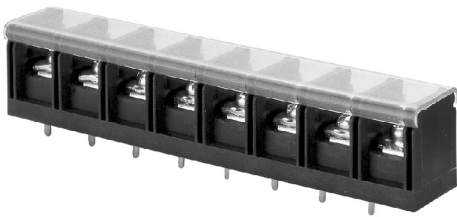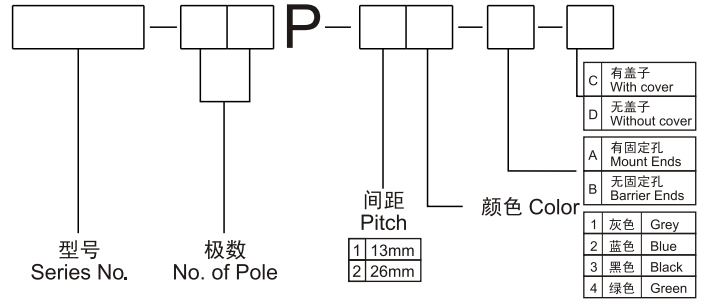

DG78C

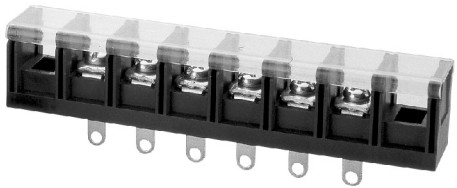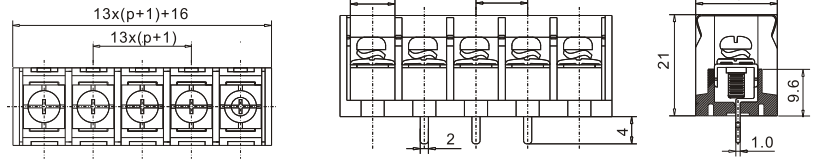

DG78H

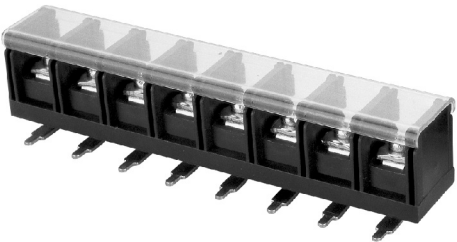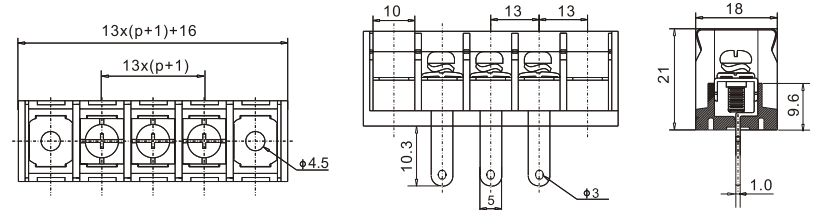

DG78R

