

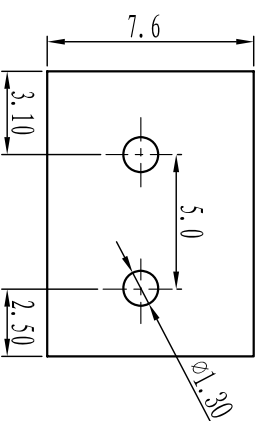
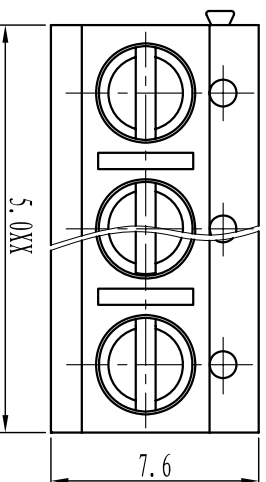


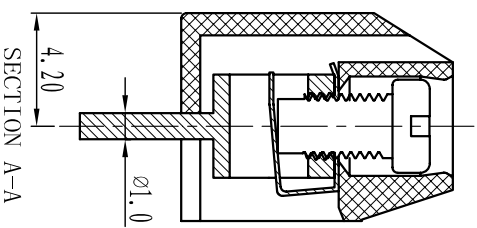

慈溪市万捷电子有限公司

CIXI WANJIE ELECTRONIC CO., LTD

产品规格书
product specification

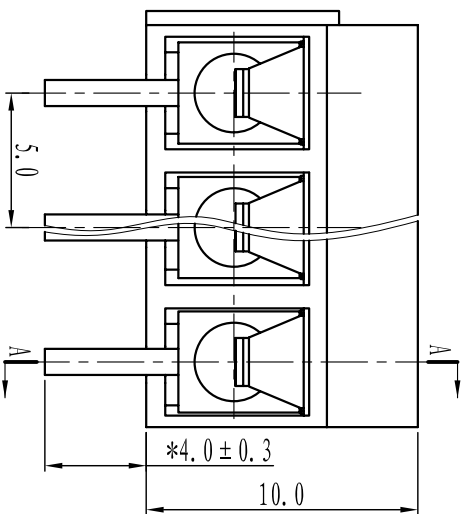

电气性能/Electrical
 参考标准/Standard: UL TEC
 额定电压/Rated voltage: 250V 250V
 额定电流/Rated current: 16A 24A
 接触电阻/Contact resistance: 20mΩ
 使用线径/Wire range: 22-14AWG 2.5mm²
 耐电压/Withstanding voltage: AC2000V/1Min
 绝缘电阻/Insulation resistance: 500MΩ/DC500V

机械性能/Mechanical

温度范围/Temp.Range: -30°C+120°C
 扭矩/Torque: 0.4Nm(3.5lb`in)
 剥线长度/Strip length: 4.5-5mm

尺寸/Dimensions

间距/Pitch: 5.0mm

极数/Poles: 2P-24P

材质及电镀/Material

塑件/Housing: PA66, UL94V-0

螺丝/Screws: M2.5, steel Zinc plated

方针/Pin header: Brass, Ni plated

弹片/Spring: Phosphor bronze, Ni plated

TOLERANCES EXCEPT AS NOTED

	Linear dimension	fillet	chamfer	short angle sid	过切	过切	过切	过切
variable range	6 to 30	to 120	to 480	to 480	all	to 6	to 10	to 120
tolerance	±0.1 to ±0.2	±0.3 to ±0.5	±0.9 to ±0.2	±0.5 to ±1	1° to 30'	30' to 10'	0.5 to 0.025	0.06 to 0.12

订购方式：
HOW TO ORDER

型号/Model - 极数/POLE - P - 客户需求/Customer Request
 未标注无缺件/No definition 上单时请/Single pin 双交齿/Double pin

灰色/Gray	10	绿色/Green	40	透明/Transparent	70
蓝色/Blue	20	棕色/Orange	50	黄色/Yellow	80
黑色/Black	30	红色/Red	60	白色/White	90

单位/UNITS mm 尺寸/SIZE A4 比例/SCALE 比例



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

名称/NAME

WJ301-XXP-1YY-00A

第一视角/FIRST ANGLE PROJECTION