

Is Now Part of



ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at <u>www.onsemi.com</u>

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor dates sheds, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor dates sheds and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use on similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor and its officers, employees, subsidiaries, affliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out or i, directly or indirectly, any lange of the applicatio customer's to unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the

September 2014



3-Terminal 1.5 A Negative Adjustable Regulator

Features


Output-Current in Excess of 1.5 A

KA337 / LM337

- Output-Adjustable Between -1.25 V and -37 V
- Internal Thermal Overload Protection
- Internal Short-Circuit Current Limiting
- Output-Transistor Safe Area Compensation
- Floating Operation for High-Voltage Applications
- Standard 3-Pin TO-220 Package

Description


The KA337 / LM337 are 3-terminal negative adjustable regulators. They supply in excess of 1.5 A over an output voltage range of -1.25 V to -37 V. These regulators require only two external resistors to set the output voltage and employ current limiting, thermal overload protection, and safe area compensation.



Ordering Information

Product Number	Package	Packing Method	Operating Temperatur	
KA337TU	TO-220 (Dual Gauge)	Rail	0°C to +125°C	
LM337T	TO-220 (Single Gauge)	indii	0 0 10 +125 0	

Block Diagram

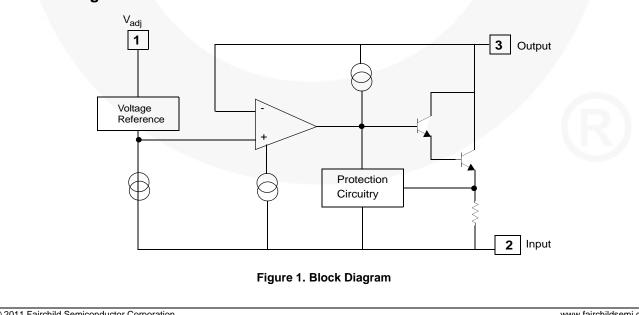

© 2011 Fairchild Semiconductor Corporation KA337 / I M337 Rev 1 1 1

Absolute Maximum Ratings

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only. Values are at $T_A = 25^{\circ}$ C unless otherwise noted.

Symbol	Parameter	Value	Unit
IV _I - V _O I	Input-Output Voltage Differential	40	V
PD	Power Dissipation	Internally Limited	W
R _{θJC}	Thermal Resistance, Junction to Case	4	°C/W
T _{OPR}	Operating Temperature Range	0 to +125	°C
T _{STG}	Storage Temperature Range	-65 to +125	°C

Electrical Characteristics


 $V_I - V_O = 5 \text{ V}, \text{ I}_O = 40 \text{ mA}, 0^{\circ}C \leq T_J \leq +125^{\circ}C, \text{ P}_{DMAX} = 20 \text{ W}; \text{ unless otherwise specified}.$

Symbol	Parameter	Conditions	Min.	Тур.	Max.	Unit	
R _{line} Line Regulati	Line Regulation ⁽¹⁾	$T_A = +25^{\circ}C,$ 3 V ≤ I V ₁ - V _O I ≤ 40 V		0.01	0.04	%/ V	
		$3 \text{ V} \le 1 \text{ V}_1 - \text{V}_0 \text{ I} \le 40 \text{ V}$		0.02	0.07		
R _{load} Load Regulati	_oad Regulation ⁽¹⁾	$T_A = +25^{\circ}C,$ 10 mA $\leq I_O \leq 0.5$ A		15	50	mV	
		$10 \text{ mA} \le I_O \le 1.5 \text{ A}$		15	150		
I _{ADJ}	Adjustable Pin Current			50	100	μA	
ΔI _{ADJ}	Adjustable Pin Current Change	$ \begin{array}{l} {\sf T}_{\sf A} = +25^{\circ}{\sf C}, \\ {\sf 10}\;{\sf mA} \le {\sf I}_{\sf O} \le 1.5\;{\sf A}, \\ {\sf 3}\;{\sf V} \le {\sf I}\;{\sf V}_{\sf I} - {\sf V}_{\sf O}\;{\sf I} \le 40\;{\sf V} \end{array} $		2	5	μA	
V _{REF} Reference Voltage		T _A =+25°C	-1.213	-1.250	-1.287	V	
	Reference Voltage	$\begin{array}{l} 3 \ V \leq I \ V_I - V_O \ I \leq 40 \ V, \\ 10 \ mA \leq I_O \leq 1.5 \ A \end{array}$	-1.200	-1.250	-1.300		
STT	Temperature Stability	$0^{\circ}C \le T_J \le +125^{\circ}C$		0.6		%	
	Minimum Load Current to Maintain	$3 \text{ V} \le 1 \text{ V}_1 - \text{V}_0 \text{ I} \le 40 \text{ V}$		2.5	10.0	mA	
I _{L(MIN)}	Regulation	$3 \text{ V} \le \text{I} \text{ V}_{\text{I}} - \text{V}_{\text{O}} \text{I} \le 10 \text{ V}$		1.5	6.0	mA	
e _N	RMS Noise, % of V _{OUT}	T _A =+25°C, 10 Hz ≤ f ≤ 10 kHz		0.003		%	
	Pipple Poinction Potio	V _O = -10 V, f = 120 Hz		60	6	ᆁᄆ	
RR	Ripple Rejection Ratio	$C_{ADJ} = 10 \ \mu F^{(2)}$	66	77		dB	
ST	Long-Term Stability	T _J = 125°C, 1000 Hours		0.3	1.0	%	

Notes:


1. Load and line regulation are specified at constant junction temperature. Change in V_0 due to heating effects must be taken into account separately. Pulse testing with low duty is used.

2. C_{ADJ}, when used, is connected between the adjustment pin and ground.

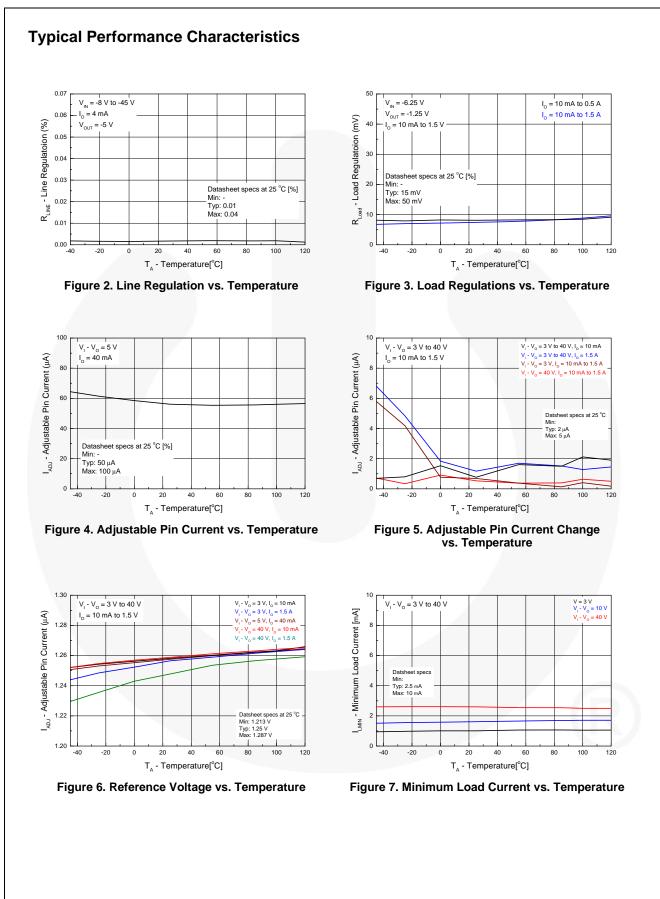

© 2011 Fairchild Semiconductor Corporation KA337 / LM337 Rev. 1.1.1

KA337 / LM337 — 3-Terminal 1.5 A Negative Adjustable Regulator

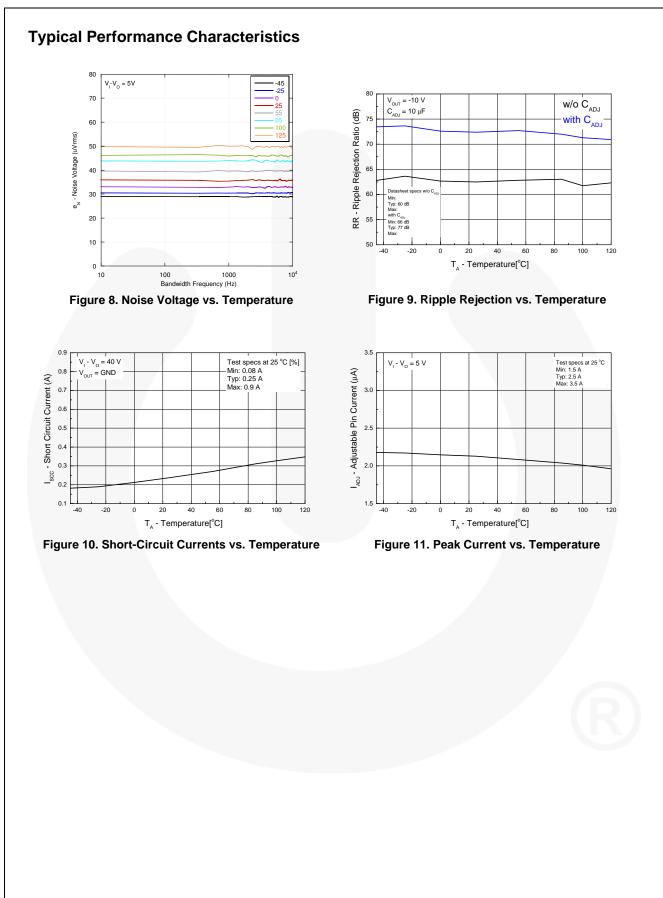


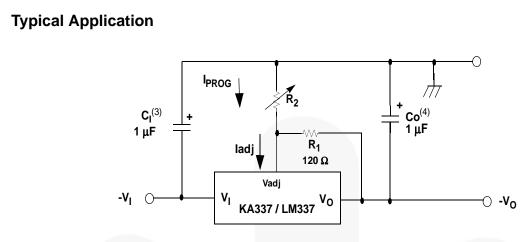


Figure 12. Typical Application

Notes:

- 3. C₁ is required if regulator is located more then 4 inches from power supply filter. 1.0 μ F solid tantalum or 10 μ F aluminum electrolytic is recommended.
- 4. C_O is necessary for stability. 1.0 μ F solid tantalum or 10 μ F aluminum electrolytic is recommended. V_O = -1.25 V (1 + R₂ / R₁).

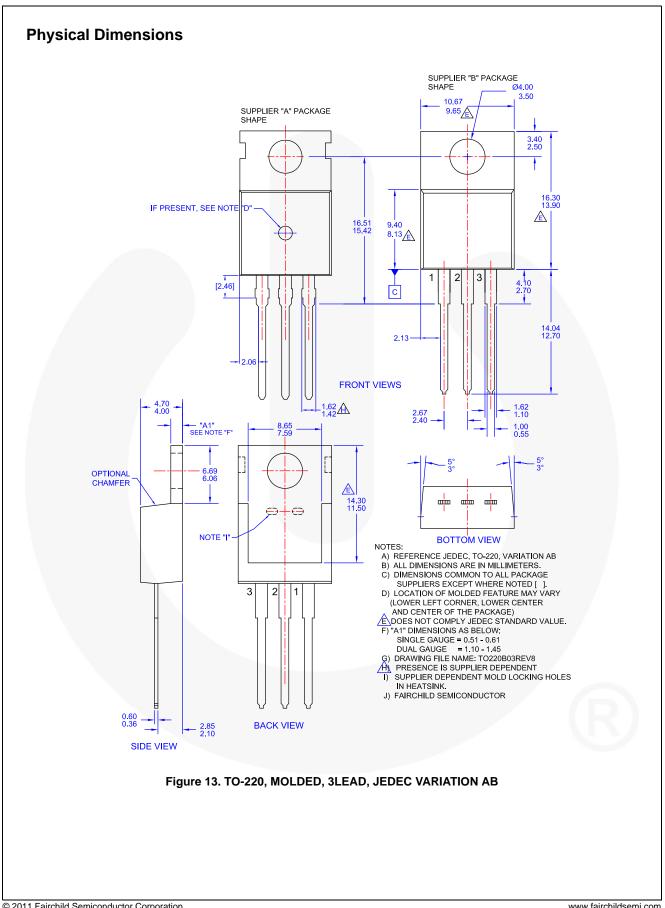

FAIRCHILD. TRADEMARKS The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks. F-PFS™ AccuPower™ Awinda[®] AX-CAP[®]* FRFET® Global Power ResourceSM TinyBoost[®] PowerTrench[®] GreenBridge™ BitSiC™ TinyBuck® PowerXS™ Build it Now™ TinyCalc™ Green FPS™ Programmable Active Droop™ TinyLogic® CorePLUS™ Green FPS™ e-Series™ **QFET**[®] CorePOWER™ Gmax™ QS™ **TINYOPTO™** CROSSVOLT™ GTO™ TinyPower™ Quiet Series™ TinyPWM™ CTL™ IntelliMAX™ RapidConfigure™ TinyWire™ Current Transfer Logic™ ISOPLANAR™ TranSiC™ DEUXPEED® Making Small Speakers Sound Louder Saving our world, 1mW/W/kW at a time™ Dual Cool™ and Better[™] TriFault Detect™ SignalWise™ **EcoSPARK**[®] TRUECURRENT®* MegaBuck™ SmartMax™ EfficientMax™ MICROCOUPLER™ µSerDes™ SMART START™ ESBC™ MicroFET™ F® Solutions for Your Success™ MicroPak™ SPM[®] MicroPak2™ LIHC Fairchild® STEALTH™ MillerDrive™ Ultra FRFET™ Fairchild Semiconductor® SuperFFT[®] MotionMax™ UniFET™ FACT Quiet Series™ SuperSOT™-3 MotionGrid® VCX™ FACT[®] FAST[®] SuperSOT™-6 MTi[®] VisualMax™ SuperSOT™-8 MTx® VoltagePlus™ FastvCore™ SupreMOS[®] MVN[®] XS™ FETBench™ SyncFET™ mWSaver® Xsens™ Sync-Lock™ **FPS™** OptoHiT™ 仙童™

* Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. TO OBTAIN THE LATEST, MOST UP-TO-DATE DATASHEET AND PRODUCT INFORMATION, VISIT OUR WEBSITE AT <u>HTTP://WWW.FAIRCHILDSEMI.COM</u>, FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.fairchildsemi.com, under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

PRODUCT STATUS DEFINITIONS

Definition of Terms				
Datasheet Identification	Product Status	Definition		
Advance Information	Formative / In Design	Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.		
Preliminary	First Production	Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.		
No Identification Needed	Full Production	Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.		
Obsolete	Not In Production	Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.		

Rev. I71 www.fairchildsemi.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Fairchild Semiconductor: