

Is Now Part of



# **ON Semiconductor**®

To learn more about ON Semiconductor, please visit our website at <u>www.onsemi.com</u>

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor dates sheds, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor dates sheds and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use on similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor and its officers, employees, subsidiaries, affliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out or i, directly or indirectly, any lange of the applicatio customer's to unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the




AIRCHILD

### Features


- Operation From 3.0 to 40V Input
- Short Circuit Current Limiting
- Low Stand-by Current
- Output Switch Current of 1.5A Without External Transistors
- Output Voltage Adjustable
- Frequency of Operation From 100Hz to 100kHz
- Step-up, Step-Down or Inverting Switching Regulators

#### Description

The KA34063A is a monolithic regulator sub system intended for use as DC to DC converter. This device contains a temperature compensated bandgap reference, a duty cycle control oscillator, a driver, and a high current output switch. It can be used for step down, step up or inverting switching regulators as well as for series pass regulators.



## **Internal Block Diagram**

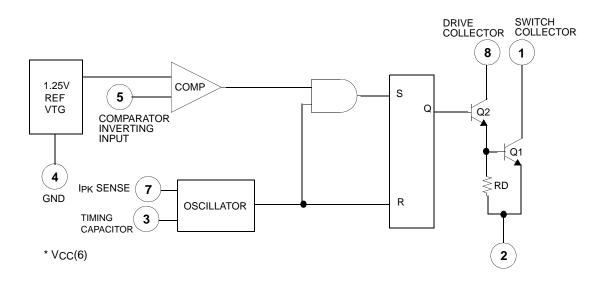

## **Absolute Maximum Ratings**

Parameter	Symbol	Value	Unit	
Supply Voltage	Vcc	40	V	
Comparator Input Voltage Range	VI(COMP)	-0.3 ~ +40	V	
Switch Collector Voltage	VC(SW)	40	V	
Switch Emitter Voltage	VE(SW)	40	V	
Switch Collector To Emitter Voltage	VCE(SW)	40	V	
Driver Collector Voltage	VC(DR)	40	V	
Switch Current	ISW	1.5	A	
Storage Temperature Range	TSTG	-65 ~ +150	°C	

## **Electrical Characteristics**

(Vcc = 5.0V, TA =  $0^{\circ}$ C to +70°C , unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Тур.	Max.	Unit	
OSCILLATOR							
Charging Current	ICHG	$V_{CC} = 5 \text{ to } 40V, T_{A} = 25^{\circ}C$	22	31	42	μΑ	
Discharging Current	IDISCHG	$V_{CC} = 5$ to 40V, $T_A = 25^{\circ}C$	140	190	260	μA	
Oscillator Amplitude	V(OSC)	TA = 25°C		0.5	-	V	
Discharge to Charge Current Ratio	K	V7 = V <sub>CC</sub> , T <sub>A</sub> = 25°C	5.2	6.1	7.5	-	
Current Limit Sense Voltage	VSENSE(C.L)	ICHG = IDISCHG T <sub>A</sub> = $25^{\circ}$ C	250	300	350	mV	
OUTPUT SWITCH							
Saturation Voltage 1 (Note1)	VCE(SAT)1	I <sub>SW</sub> = 1.0A V <sub>C</sub> (driver) = V <sub>C</sub> (SW)	-	0.95	1.3	V	
Saturation Voltage 2 (Note1,2)	VCE(SAT)2	I <sub>SW</sub> = 1.0A, V <sub>C</sub> (driver) = 50mA	-	0.45	0.7	V	
DC Current Gain (Note1,2)	GI(DC)	I <sub>SW</sub> = 1.0A, VCE = 5.0V, T <sub>A</sub> = 25°C	50	180	-	-	
Collector off State Current (Note1)	IC(OFF)	VCE = 40V, TA = 25°C	-	0.01	100	μA	
COMPARATOR							
Threshold Voltage	VTH	-	1.21	1.24	1.29	V	
Threshold Voltage Line Regulation	Δντη	VCC = 3 to 40V	-	2.0	5.0	mV	
Input Bias Current	IBIAS	$V_I = 0V$	-	50	400	nA	
TOTAL DEVICE							
Supply Current	ICC	V <sub>CC</sub> = 5 to 40V, C <sub>T</sub> = 0.001uF V <sub>7</sub> = V <sub>CC</sub> , V <sub>5</sub> >V <sub>TH</sub> pin2 = GND	-	2.7	4.0	mA	

#### Note :

1. Output switch tests are performed under pulsed conditions to minimize power dissipation.

2. These parameters, although guaranteed, are not 100% tested in production.







Figure 1. Temperature Drift (VTH)

#### **Mechanical Dimensions**

#### Package

#### **Dimensions in millimeters**

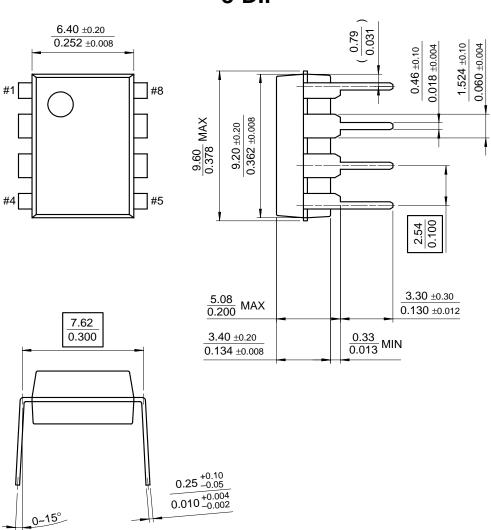

8-DIP

#### Mechanical Dimensions (Continued)

#### Package



8-SOP MIN <u>0.1~0.25</u> 0.004~0.001 1.5<u>5</u> ±0.20 0.061 ±0.008 0.56 #1 #8  $\bigcirc$  $\frac{4.92 \pm 0.20}{0.194 \pm 0.008}$ MAX 5.13 0.202  $\begin{array}{c} 0.41 \pm 0.10 \\ 0.016 \pm 0.004 \end{array}$ #4 #5 1.27 0.050 6.00 ±0.30  $\frac{1.80}{0.071} \text{ MAX}$  $\overline{0.236 \pm 0.012}$ 0.15 -0.05 0.006 -0.004 MAX0.10 MAX0.004 3.95 ±0.20 0.156 ±0.008 0000 5.72 0.225  $0.50 \pm 0.20$  $\overline{0.020 \pm 0.008}$ 

#### **Ordering Information**

Product Number	Package	Operating Temperature	
KA34063A	8-DIP	0 ~ +70°C	
KA34063AD	8-SOP	0~+70 C	

#### DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Fairchild Semiconductor: KA34063AD KA34063ADTF KA34063A KA34063ADSTF